

ME SERIES:- REFRIGERATORS. Designed for 43° Ambient.



ME-S6



ME-S7



ME-D10



ME-T16

ME Series Refrigerators

FEATURES:

- Bottom mounted compressor for cooler running and ergonomic shelf positioning.
- Door activated evaporator fan switches for increased energy efficiency.
- Bright white painted finish for a great clean look. ME-D10 also available in BLACK
- LOW-E glass to reduce condensation build up and better energy efficiency.
- Self closing hinged doors.
- LED Super Bright White interior Lights. Replaceable with removing all of your stock.
- LED light to display canopy.
- Factory installed PVC coated adjustable shelves fitted with ticket strips.
- Automatic defrost by thermostat cycle.
- Removable door gasket to allow cleaning.
- Temperature range 0° to 10° C.
- Standard Industrial Castors . Front locking.
- Utilizes environmentally friendly R134a refrigerant.
- LED digital temperature display

MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Doors	Net Volume (L)	Shelves	Dimensions (mm)	Amps (240v 50Hz)	Energy (Kwh/24h)	Cord Length	Shipping Weight
ME-S6	1	650	5	690 w x 800d x 2098h	2	5.4	2.4	112kg
ME-S7	1	720	5	770w x 800d x 2098h	2	5.4	2.4	128kg
ME-D10	2	1020	10	1160w x 720d x 2098h	2.3	7	2.4	203kg
ME-T16	3	1590	15	1750w x 720d x 2098h	4.3	11.4	2.4	279Kg

ME SERIES:- REFRIGERATORS. Designed for 43° Ambient.

Specification

- **Shelves:** 5 adjustable, PVC coated, steel shelves per door.
- **Construction:** External is painted steel with a clear anodized aluminium back. Interior white powder coated aluminium for hygienic easy to clean surfaces.
- **Insulation:** 45mm high density polyurethane foam, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- **Lighting:** Interior lights activated by rocker switches mounted above each door.
- **Door:** Double Glazed glass.
- **Gasket:** PVC welded one piece magnetic gasket. Removable without tools for easy cleaning.
- **Hinging:** Self closing.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- **Electronic Controller:** Italian designed and Manufactured,

- **Refrigeration System:** Fully balanced self-contained condensing unit with forced draught evaporator.
- **Compressor:** ASR's equipment is fitted with Danfoss compressors, a world leader in domestic and light commercial compressors.
- **Refrigerant:** R134a.
- **Defrost:** Cyclic defrost. Utilizing no-cost hot gas condensate disposal.
- **Evaporator:** Copper and Aluminium cross fin coil. Fan forced.
- **Castors:** 100mm heavy duty castors. Front locking.
- Digital Temperature readout.
- **Warranty¹:** Austwide's Manufacturers warranty 12 month parts and labour.

Options:

- 6" legs.
- Low profile casters. Total height reduced to 2075mm
- 304 Stainless steel construction. (non stock items).


Outstanding Benefits

High ambient model: Designed to run in 43°C Ambient .


Optimal product placement: The ME Series lifts the product off the floor, placing it in the optimal position for your staff to easily reach in and retrieve without the need to bend down excessively.

Bottom Mounted Condensing unit: The AC Series places the condenser in the coolest position, close to the floor, putting less strain on the refrigeration system thus providing longer life and greater energy efficiency.


ELEVATIONS. (not to scale)

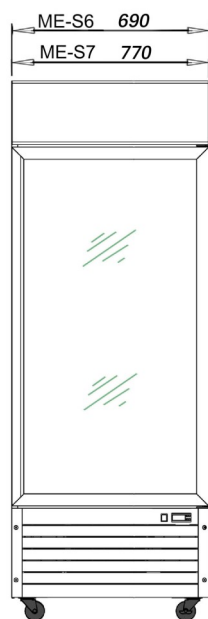


ELEVATION

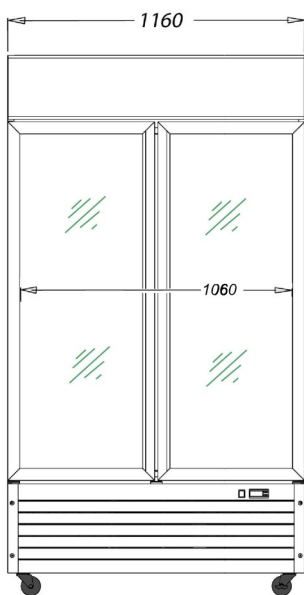

ELEVATION

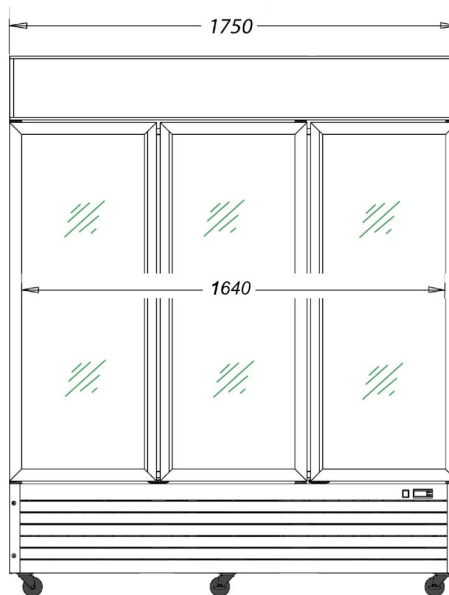

ELEVATION

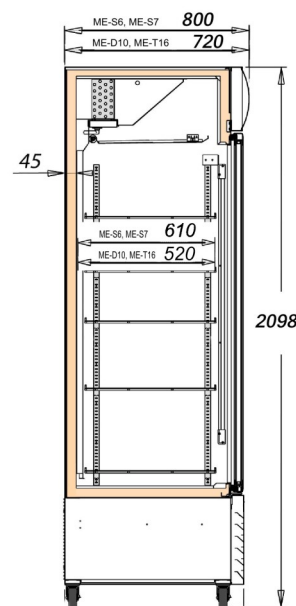

SECTIONAL END VIEW

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com